

Features

- Ultra Stable
- Wide Temperature Range
- Fast Warming-up
- Ultra Low Phase Noise

Applications


- Base Stations
- Instrumentations
- Synthesizer
- Medical Electronics


BO2020H Specifications

Parameter	Value			Unit	Condition	
	Min.	Typ.	Max.			
Supply Voltage	–	5.0	–	V	V _{cc} ±5%	
	–	12.0	–	V	V _{cc} ±5%	
Power Consumption	–	–	4.5	W		
	–	–	1.5	W		
Frequency Range	50 to 120			MHz		
Nominal Frequency	50, 80, 100, 120			MHz		
Initial Frequency Tolerance	±100	–	±300	ppb	At shipment, nominal EFC	
Freq. Stability Vs. Temp.	±50	–	±100	ppb	-40°C ~ +70°C	
	±100	–	±200	ppb	-40°C ~ +85°C	
	±200	–	±500	ppb	-55°C ~ +85°C	
HCMOS	V _{OH}	2.4	–	–	V	HCMOS Output, Load=15pf
	V _{OL}	–	–	0.4	V	HCMOS Output, Load=15pf
	Duty Cycle	45	–	55	%	(V _{OH} - V _{OL})/2
	Rise/Fall edge	–	–	6	ns	HCMOS Output, Load=15pf
	Load	–	15	–	pf	
Sine Wave	Output Level	7	–	–	dBm	
	Harmonics	–	–	-40	dBc	
	Spurious	–	–	-80	dBc	
	Load	–	50	–	Ω	
Short-term Stability@100MHz	–	–	1×10 ⁻¹¹	ppb/s	Test after 15 Min.	
Warm-up Time	0	–	5	Min	At +25°C, with tolerance ±100ppb	
Supply Sensitivity	–	–	±10	ppb	V _{cc} ±5%	
Load Sensitivity	–	–	±10		Load±5%	
Aging per Day	–	–	±2		After 30 days of operation	
Aging per Year	–	–	±200		After 30 days of operation	
SSB Phase Noise @100MHz	–	–	-100	dBc/Hz	Offset 10Hz	At +25°C, 12V
	–	–	-130		Offset 100Hz	
	–	–	-160		Offset 1kHz	
	–	–	-170		Offset 10kHz	
	–	–	-170		Offset 100kHz	
Control Voltage Range	0	–	5	V		
Frequency Turning Range	±0.5	–	±2.0	ppm		
Tuning Slope	Positive					

Environmental Conditions	
Operating Temperature Range	-55°C ~ +85°C
Storage Temperature Range	-55°C ~ +125°C
Reliability	
Parameter	Condition
Temperature Stress Test	IEC60068, GJB360B
Mechanical Stress Test	IEC60068, GJB360B
EMC Test (ESD)	IEC61000, JESD22
Solderability	EIA/JESD22-B102-C
RoHS	RoHS Directive 2011/65/EU Annex II Recasting 2002/95/EC

Outline Dimension & Pin Connections

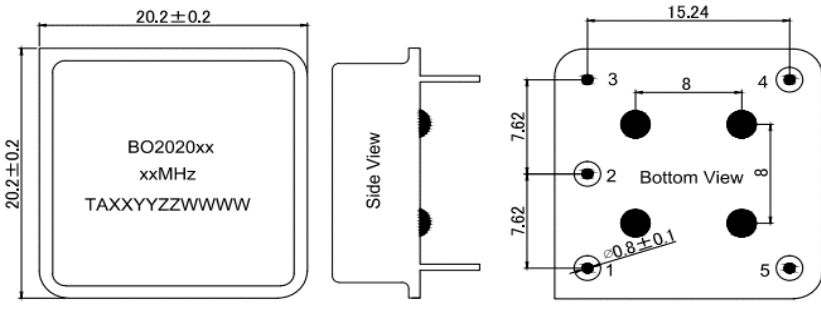


Pin Connections

Pin1	Vcon	Control Voltage
Pin2	Ref	Voltage Reference
Pin3	GND	Ground_Case
Pin4	Fout	Output
Pin5	Vdd	Power Supply

Note:
 1. Leave Pin 1 unconnected if Vcon is not used.
 2. Leave Pin 2 unconnected if Ref is not used.
 3. Reference connection of voltage control circuit.

Ordering Guide

BO 2020 H X X X XXX X X XXX.X

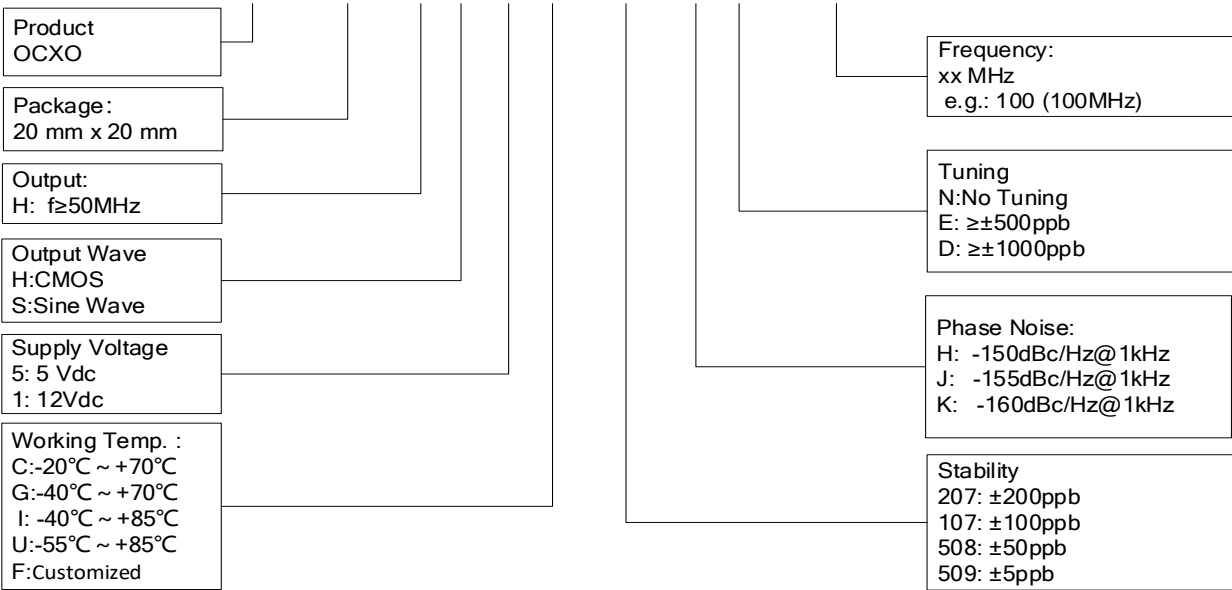

Example: BO2020HS1C107KN100

Disclaimer

XtalTQ Technologies Co., Limited reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.